
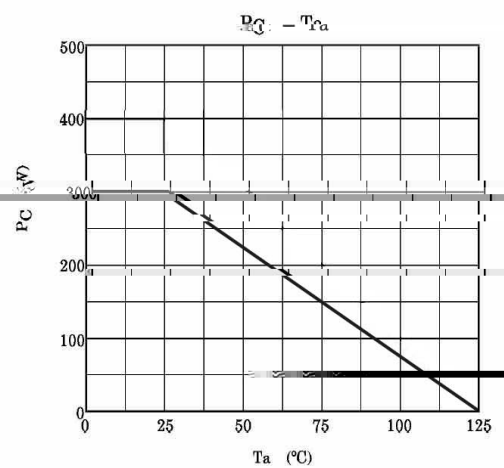
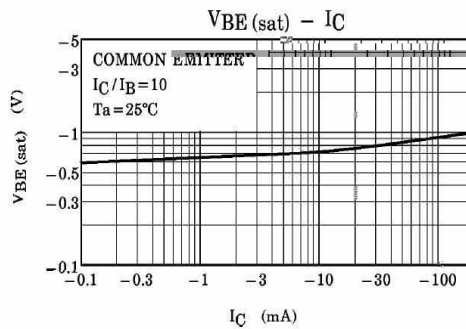
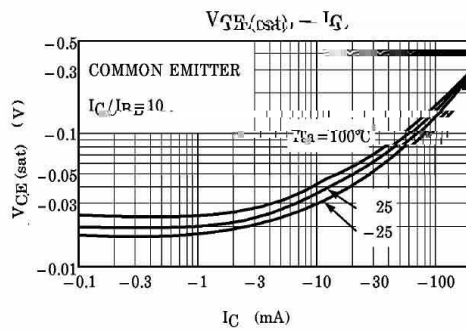
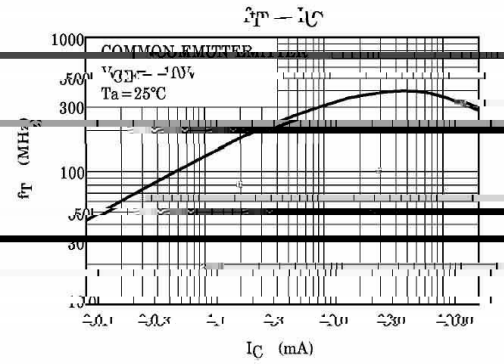
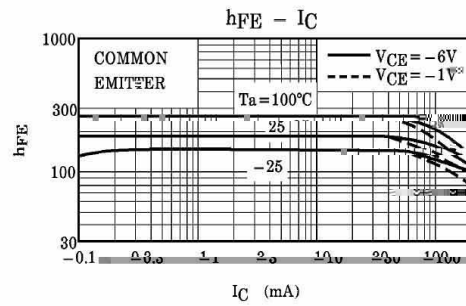
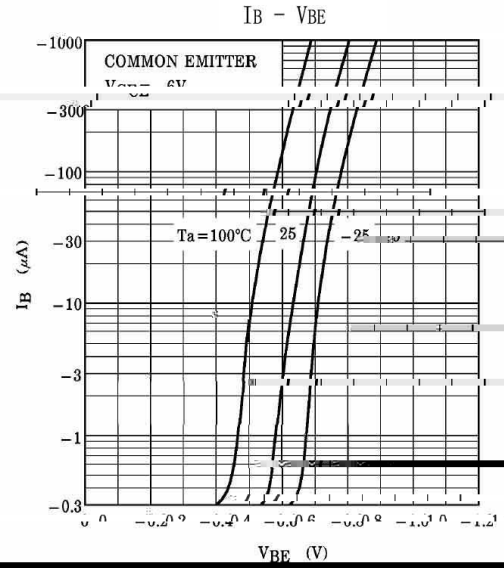


High voltage and high current, excellent h_{FE}


Parameter	Symbol	Rating	Unit
Collector to Base Voltage	V_{CBO}	-50	V
Collector to Emitter Voltage	V_{CEO}	-50	V
Emitter to Base Voltage	V_{EBO}	-5.0	V
Collector Current	I_C	-150	mA
Base Current	I_B	-50	mA
Collector Power Dissipation	P_C	300	mW
Junction Temperature	T_j	150	
Storage Temperature Range	T_{stg}	-55 150	

Parameter Symbol

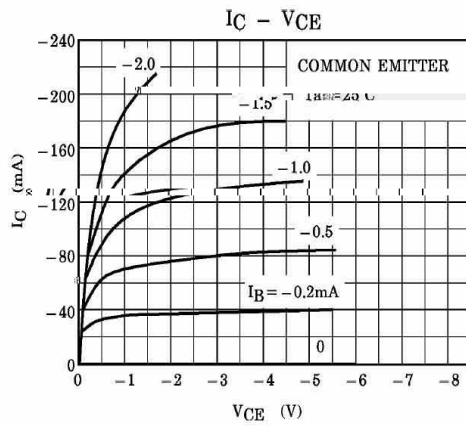

Rev.F Apr.-2017



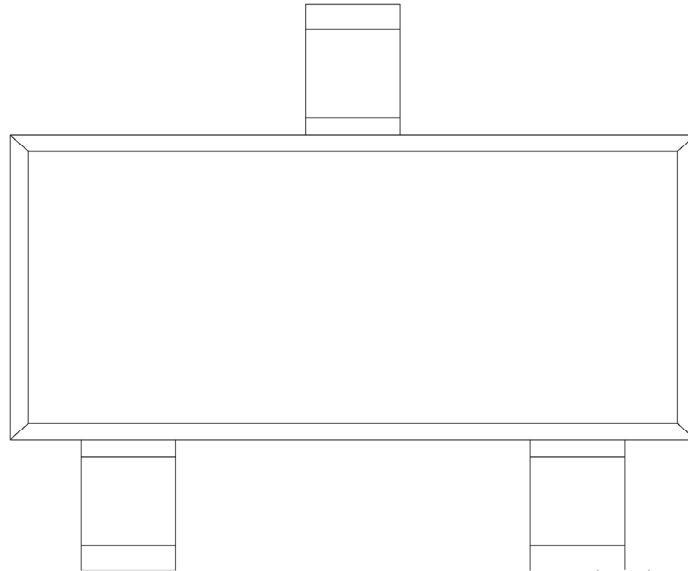

H

BA

O: h_{FE}


Note:

H: Company Code.

BA: Product Type Code

O: h_{FE}

Temperature Profile for IR Reflow Soldering(Pb-Free)

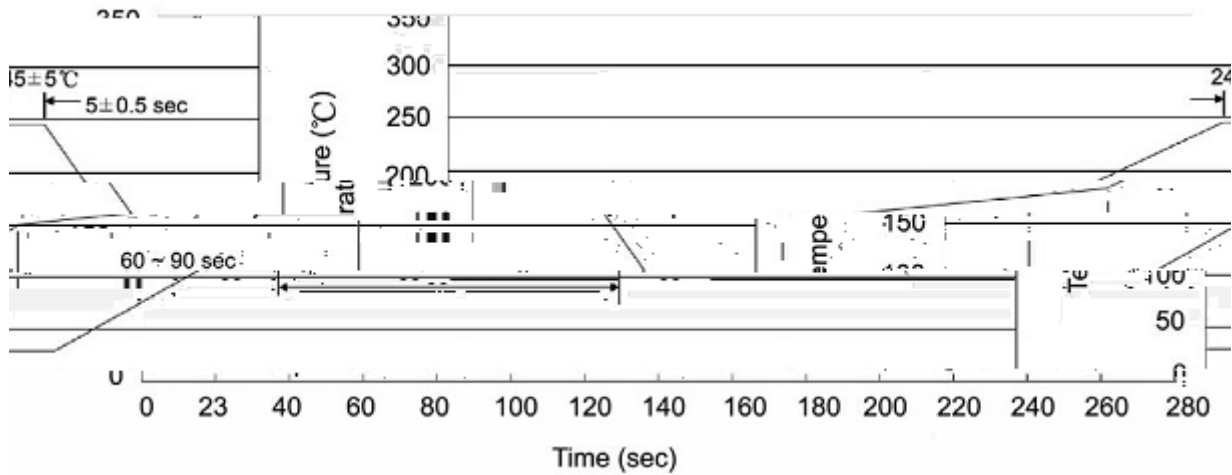

Note:

- 1

25 150

60 90sec;

1.Preheating:25~150 , Time:60~90sec.
- 2

245±5

5±0.5sec;

2.Peak Temp.:245±5 , Duration:5±0.5sec.
- 3

2 10 /sec.

3. Cooling Speed: 2~10 /sec.

260±5

10±1 sec.

Temp.:260±5

Time:10±1 sec

/ REEL

Package Type	Units					Dimension (unit mm ³)		
	Units/Reel	Reels/Inner Box	Units/Inner Box	Inner Boxes/Outer Box	Units/Outer Box	Reel	Inner Box	Outer Box
SOT-23	3,000	10	30,000	8	180,000	7 ×8	180×120×180	390×385×205