


TO-252 9 2 ... 0ž Voltage Regulator in a TO-252 Plastic Package.

€ 1 9 2 ... k ý ß v ä ' Ä — ½ ' y ? è ' ò ož
3-Terminal regulators ,output current up to 1.5A, internal thermal overload protection and short-circuit limiting.


9 2 ... 0ž
Voltage Regulator.




@ f Parameter	... Z Symbol	f > Rating	% y Unit
Input voltage	V _I	35	V
	R _{JA}	65	/W
	JC	5.0	/W
	OPR	0 125	
Storage temperature range	T	-65 150	

@ f Parameter	... Z Symbol	y i Ú ^ Test Conditions	Â 4 > Min	Á ° > Typ	Â Ý > Max	% y Unit
Output voltage	V _O	T _j =25	9.6	10	10.4	V


Electrical Characteristic Curve

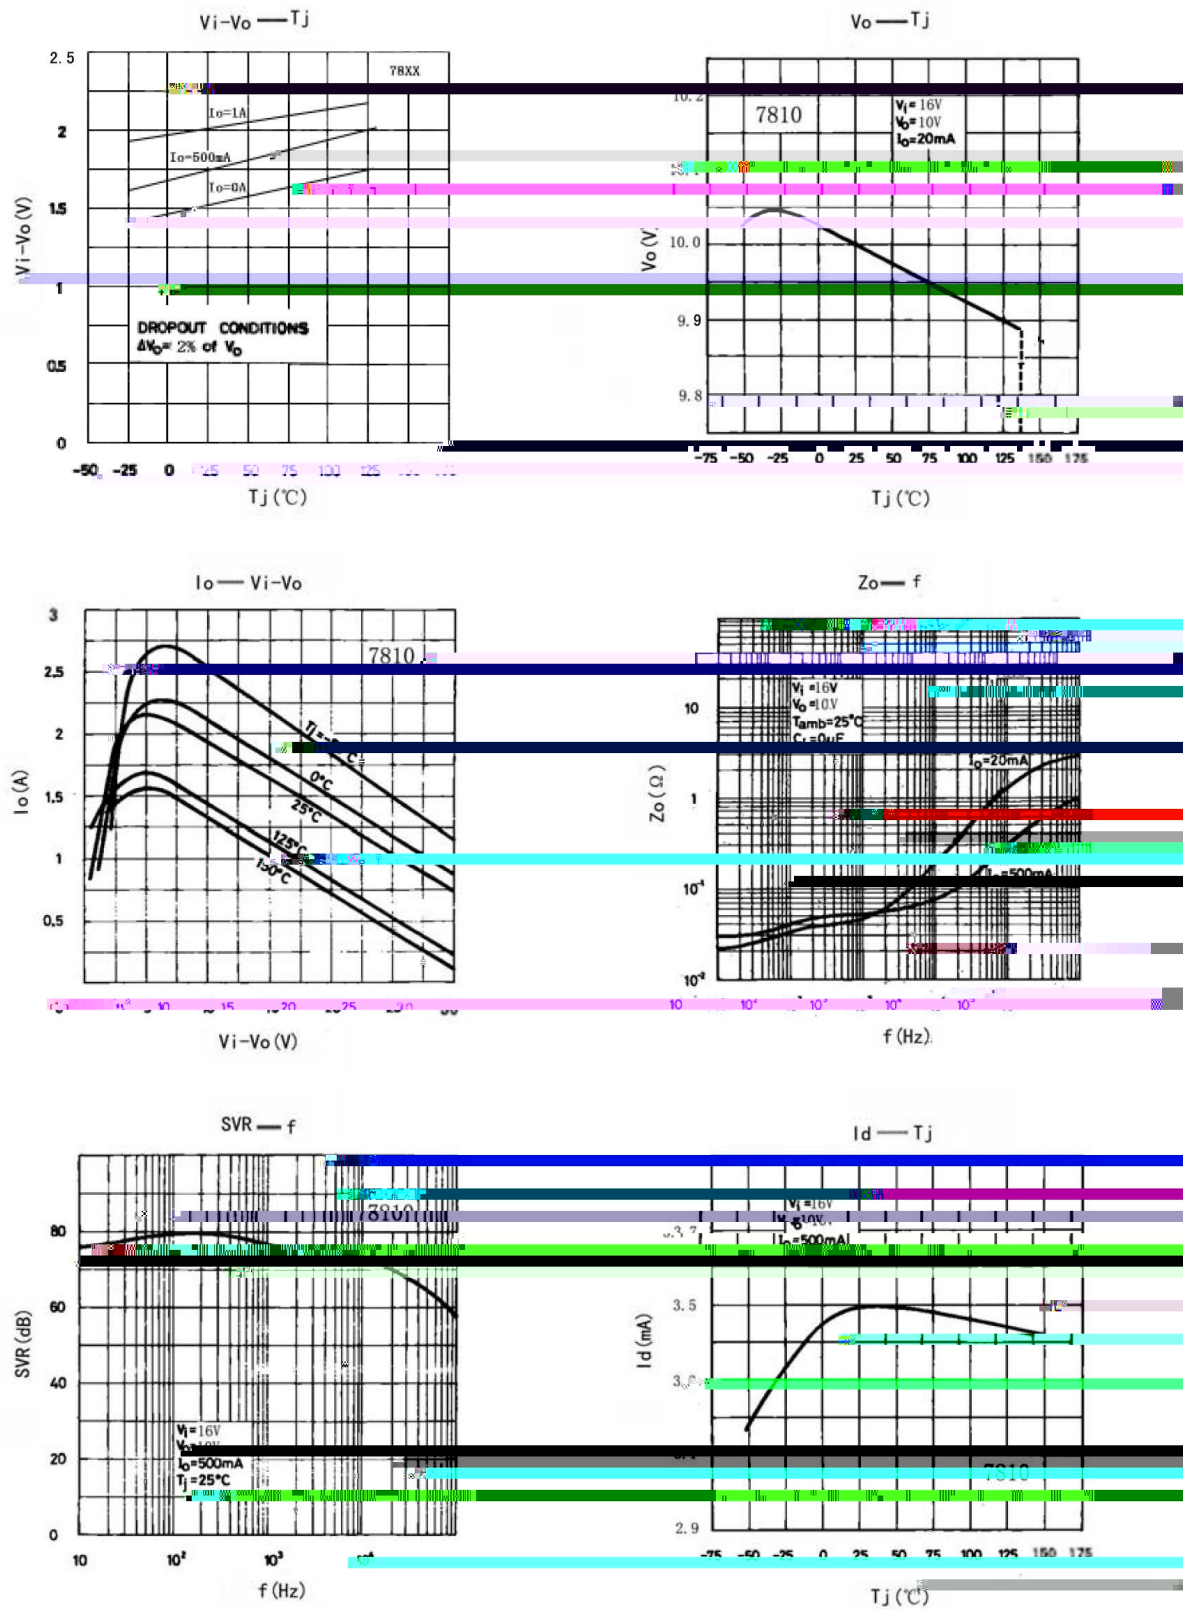

Ø □ =) ♂ / Package Dimensions

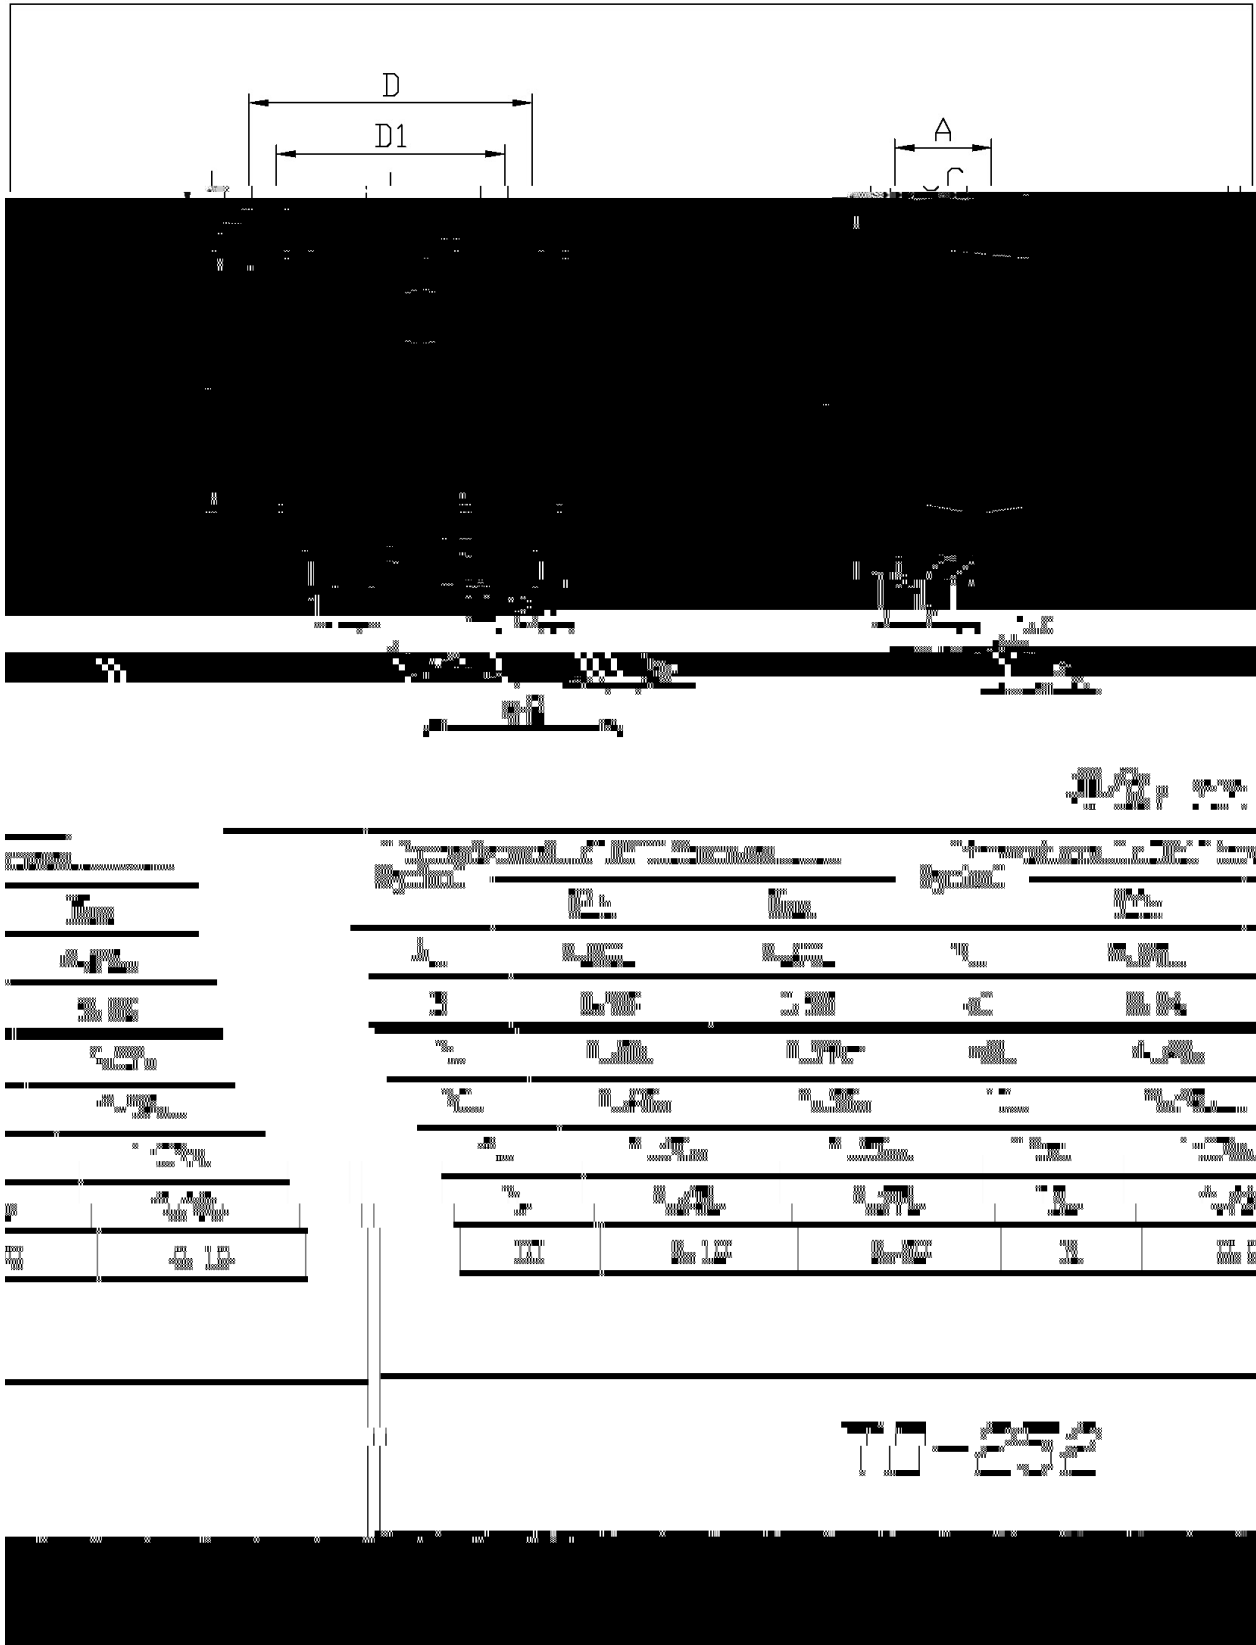

Marking Instructions

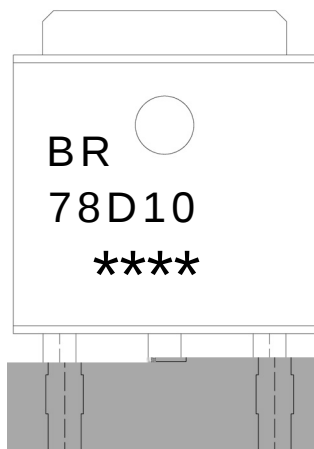

a ɸ y
 (8 y , [W A
 * y D } ° Z
 y Ÿ D Z W A k š Ÿ D Z J ož
 Note:
 BR: Company Code.
 78D10: Product Type.
 ****: Lot No. Code, code change with Lot No.

