


/ Descriptions

TO-252 ММ 3 я 7Q H Voltage Regulator in a TO-252 Plastic Package.

с 14 я 7Q H 1, 3 3 1 3 ~
3-Terminal regulators ,output current up to 0.5A, internal thermal overload protection and short-circuit limiting.

3 я 7Q H
Voltage Regulator.

/ Equivalent Circuit or Application Circuit



PIN1 X IN PIN 2 4 X GND PIN 3 X OUT

/ Marking

м 1 ~ Â See Marking Instructions.

Rev.G Sep.-2018



蓝箭电子
BLUE ROCKET ELECTRONICS

DATA SHEET

$v \text{ } ^\circ\text{Q}$ Parameter	$\uparrow \text{ } ^\text{N}$ Symbol	$^\circ\text{Q} \ddot{\text{O}}$ Rating	$\text{D } \text{H}$ Unit
--	---	--	------------------------------

Input voltage %

78M05


Rev.G Sep.-2018

DATA SHEET

78M05

Rev.G Sep.-2018

/ Marking Instructions

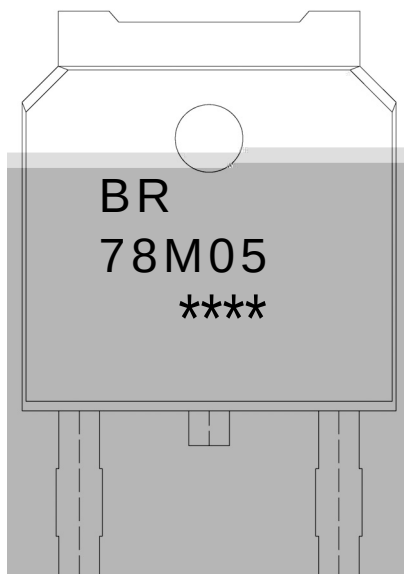

" X

EU X

: ; P 38 X

---- X

Note:

BR:

78M05:

****:

公司代码

产品型号


批次代码 或 批次代码变更

Company Code.

Product Type.

Lot No. Code, code change with Lot No.

() / Temperature Profile for IR Reflow Soldering(Pb-Free)

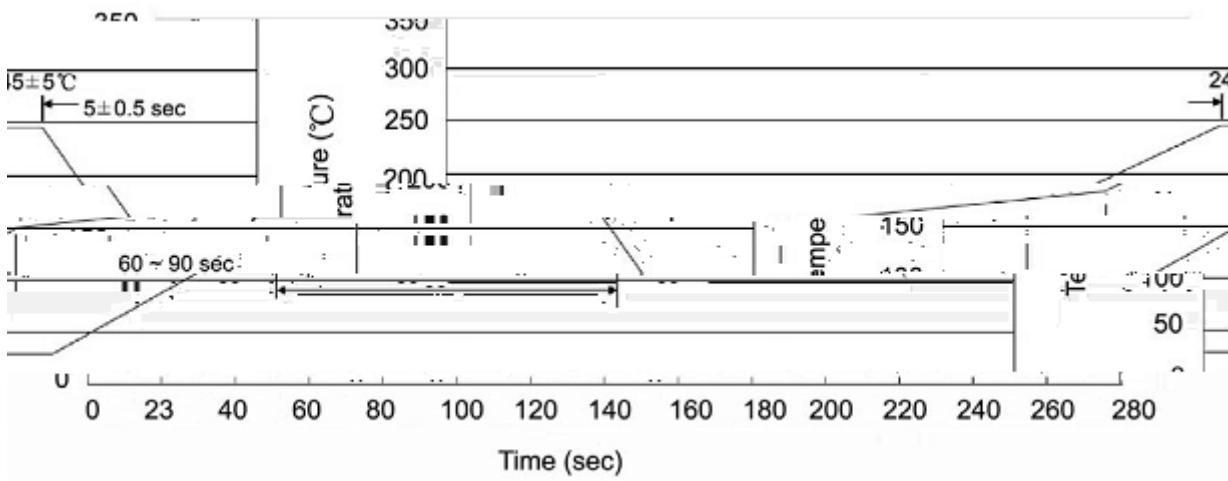

” X

1. 150~180 ℃, Time: 60~90sec;
2. 245±5 ℃, Duration: 5±0.5sec;
3. 2~10 ℃/sec.

Note:

1. Preheating: 150~180 ℃, Time: 60~90sec.
2. Peak Temp.: 245±5 ℃, Duration: 5±0.5sec.
- 3.