







DFN0603


ESD

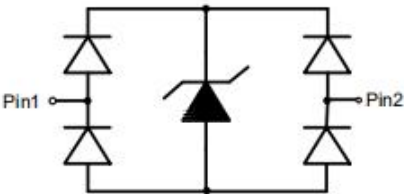

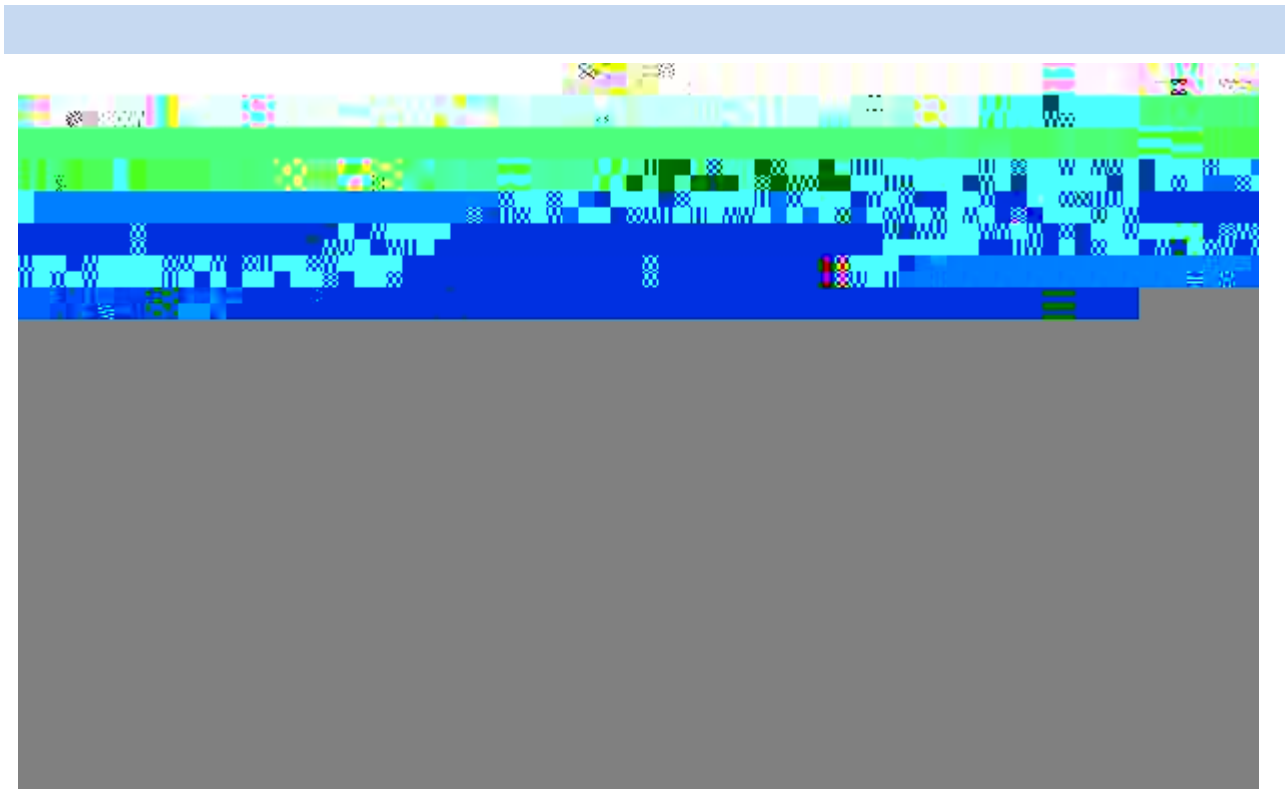

- Notes:
- 1) TLP parameter: $Z_0 = 50\Omega$, $t_p = 100\text{ns}$, $t_r = 2\text{ns}$, averaging window from 60ns to 80ns . RDYN is calculated from 4A to 16A .
 - 2) Contact discharge mode, according to IEC61000-4-2.
 - 3) Non-repetitive current pulse, according to IEC61000-4-5.



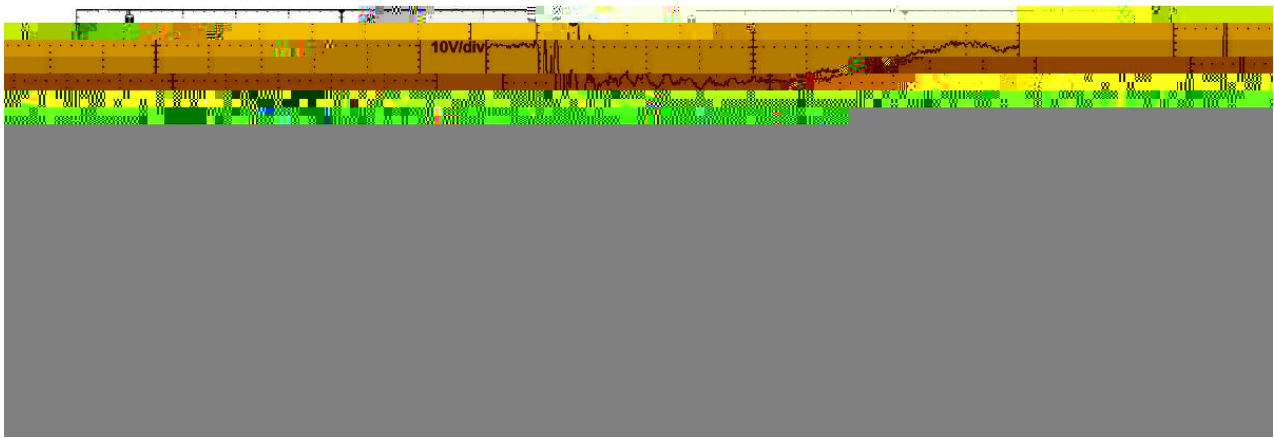


20
16 $Z = 50\Omega$





U3
*

U

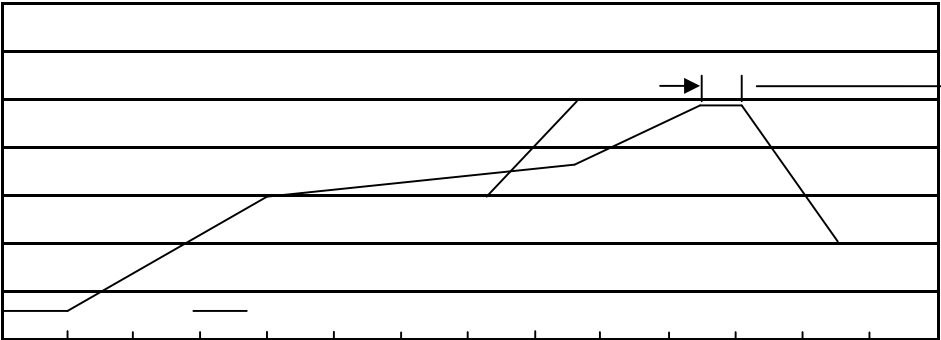

± °C ± °C ± °C ± °C

± °C ± °C °C

封装形式	包装数量					包装尺寸		
	Units/Reel	Reels/Inner Box	Units/Inner Box	Inner Boxes/Outer Box	Units/Outer Box	Reel	Inner Box 盒	Outer Box 箱
DFN0603-2L		10	100,000	6	600,000	7" ×8	180×120×180	390×385×205