

BZT52CXXX

Rev.I Feb.-2026



蓝箭电子
BLUE ROCKET ELECTRONICS

DATA SHEET

SOD-123


Zener Diode in a SOD-123 Plastic Package.

500mW

500mW power dissipation, medium current, automated assembly processes, HF Product.

2.4V-39V

2.4V to 39V wide zener voltage range applications.

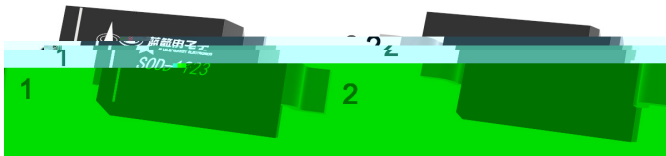

PIN1:Cathode

PIN2:Anode

BZT52CXXX


T52CXXX

Feb.-2026


/ Electrical Characteristics(Ta=25)

Type Number	Marking Code	Zener Voltage Range (Note 2)				Maximum Zener mpedance (Note 3)			Maximum Reverse Current (Note 2)		Typical Temperature Coefficient @I _{ZTC} mV/°C		Test Current I _{ZTC}
		V _Z @I _{ZT}			I _{ZT}	Z _{ZT} @I _{ZT}	Z _{ZK} @I _{ZK}	I _{ZK}	I _R	@V _R	Min	Max	
		Nom (V)	Min (V)	Max (V)	mA	Ω		mA	uA	V			
52C11	HWG	11	10.4	11.6	5	20	150	1	0.1	8	5.4	9	5
52C12	HWH	12	11.4	12.7	5	25	150	1	0.1	8	6	10	5
52C13	HWI	13	12.4	14.1	5	30	170	1	0.1	8	7	11	5
52C15	HWJ	15	13.8	15.6	5	30	200	1	0.1	10.5	9.2	13	5
52C16	HWK	16	15.3	17.1	5	40	200	1	0.1	11.2	10.4	14	5
								1	0.1	12.6	12.4	16	5
								1	0.1	14	14.4	18	5
								1	0.1	15.4	16.4	20	5

/ Electrical Characteristic Curve

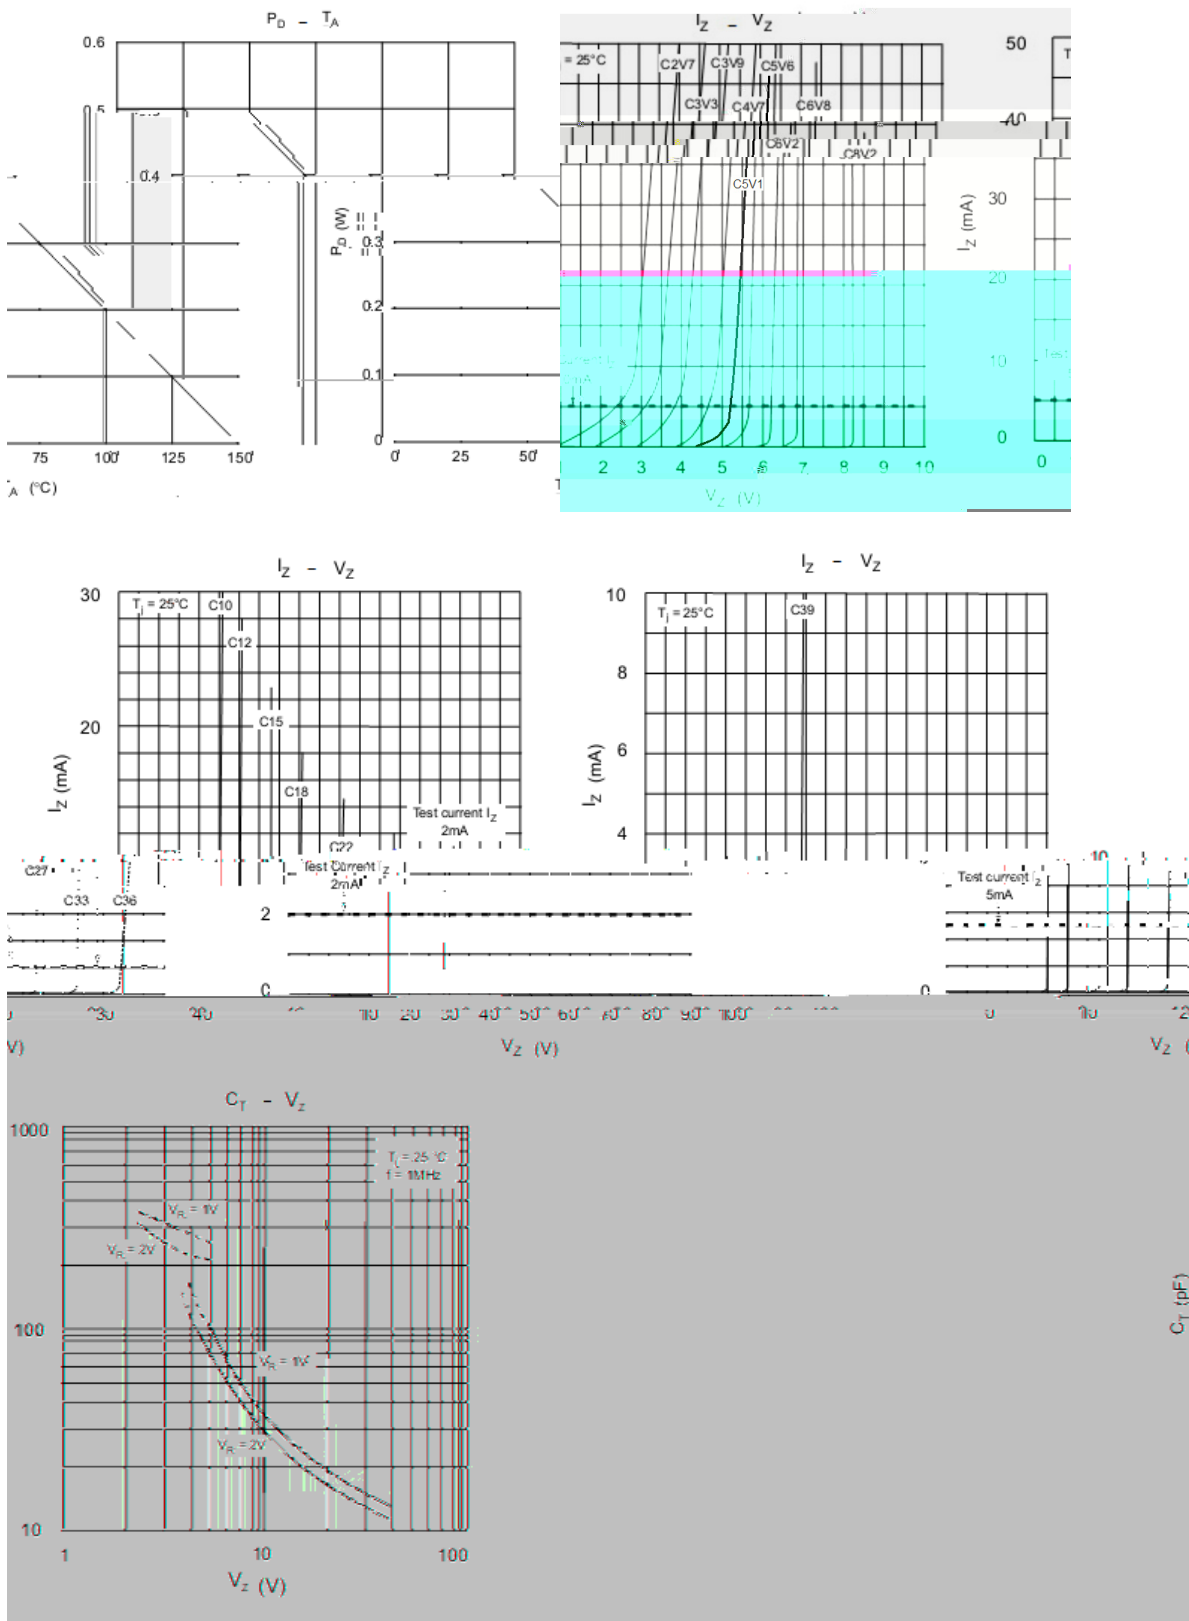

/ Package Dimensions

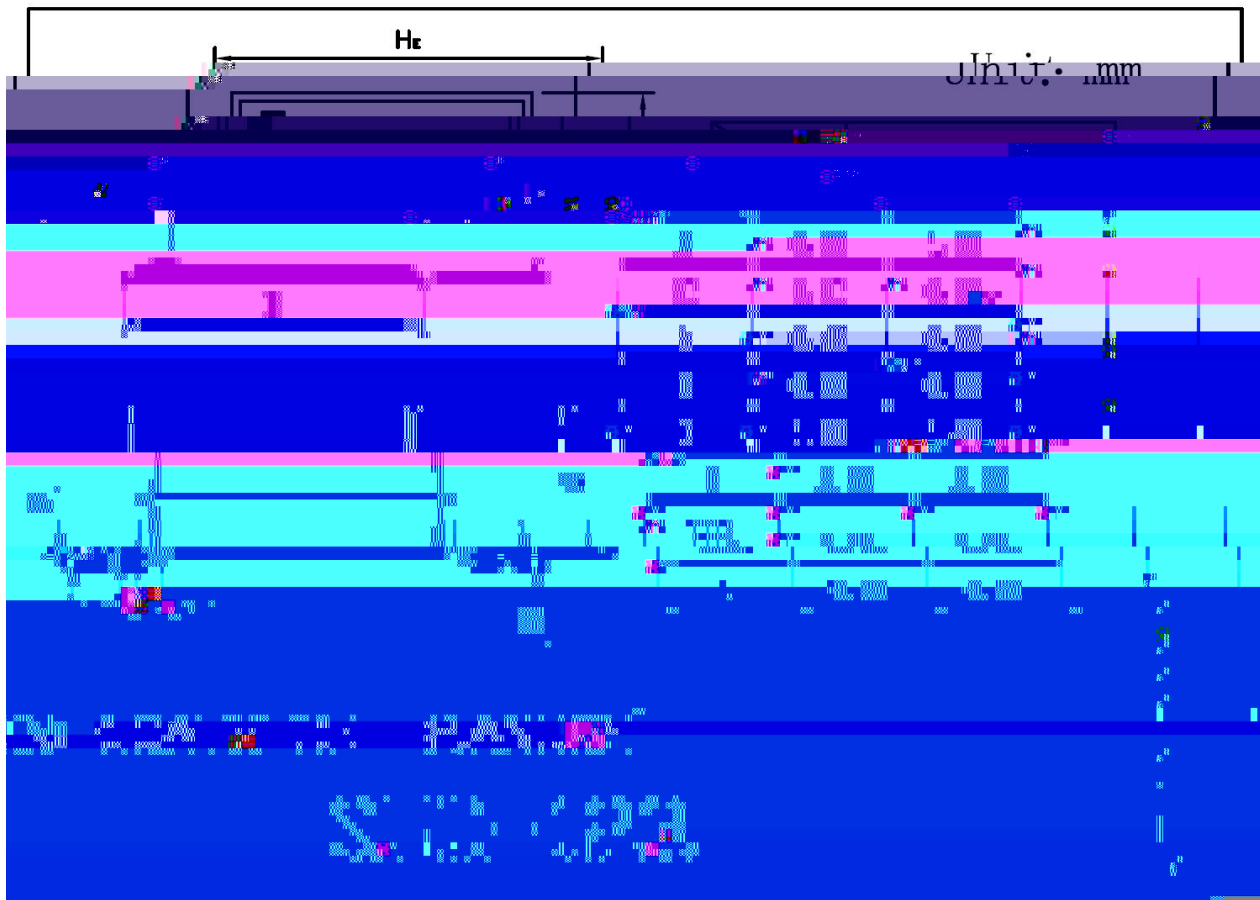

/ Marking Instructions




H

WX

Note:

H: Company Code

WX: Product Type Code

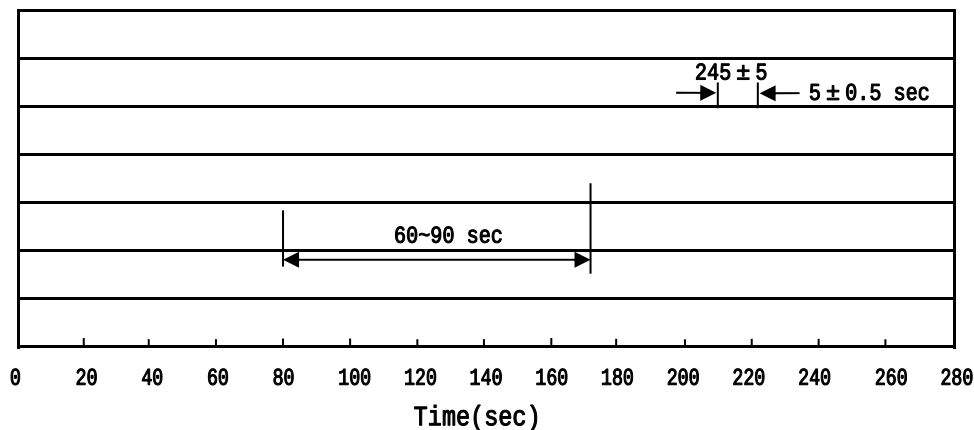() / Temperature Profile for IR Reflow Soldering(Pb-Free)


Note:

- | | | | | | |
|---|-------|-----|-----------|--------|---|
| 1 | 150 | 180 | 60 | 90sec; | 1.Preheating:150~180 , Time:60~90sec. |
| 2 | 245±5 | | 5±0.5sec; | | 2.Peak Temp.:245±5 , Duration:5±0.5sec. |
| 3 | | 2 | 10 | /sec. | 3. Cooling Speed: 2~10 /sec. |

/ Resistance to Soldering Heat Test Conditions

260±5 10±1 sec. Temp.:260±5 Time:10±1 sec

/ Packaging SPEC.

/ REEL

Package Type	Units					Dimension (unit mm ³)		
	Units/Reel /	Reels/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Reel	Inner Box	Outer Box
SOD-123	3,000	10	30,000	6	180,000	7 ×8	180×120×180	390×385×205

/ Notices