



--	--	--	--	--



/ Descri; <io9s

/ =e7<>res

With built-in bias resistors, simplify circuit design, reduce a quantity of parts and manufacturing process,HF Product.

/ A; ; ?ic7<io9s

Switching applications, interface circuit and driver circuit applications.

/ E@>iv7?e9< Circ>i<



/ Ai99i9 :




PIN 1 IN PIN 2 GND PIN 3 OUT

/ 67r8i9 :

Marking	H62
---------	-----






I Electronic Characteristics

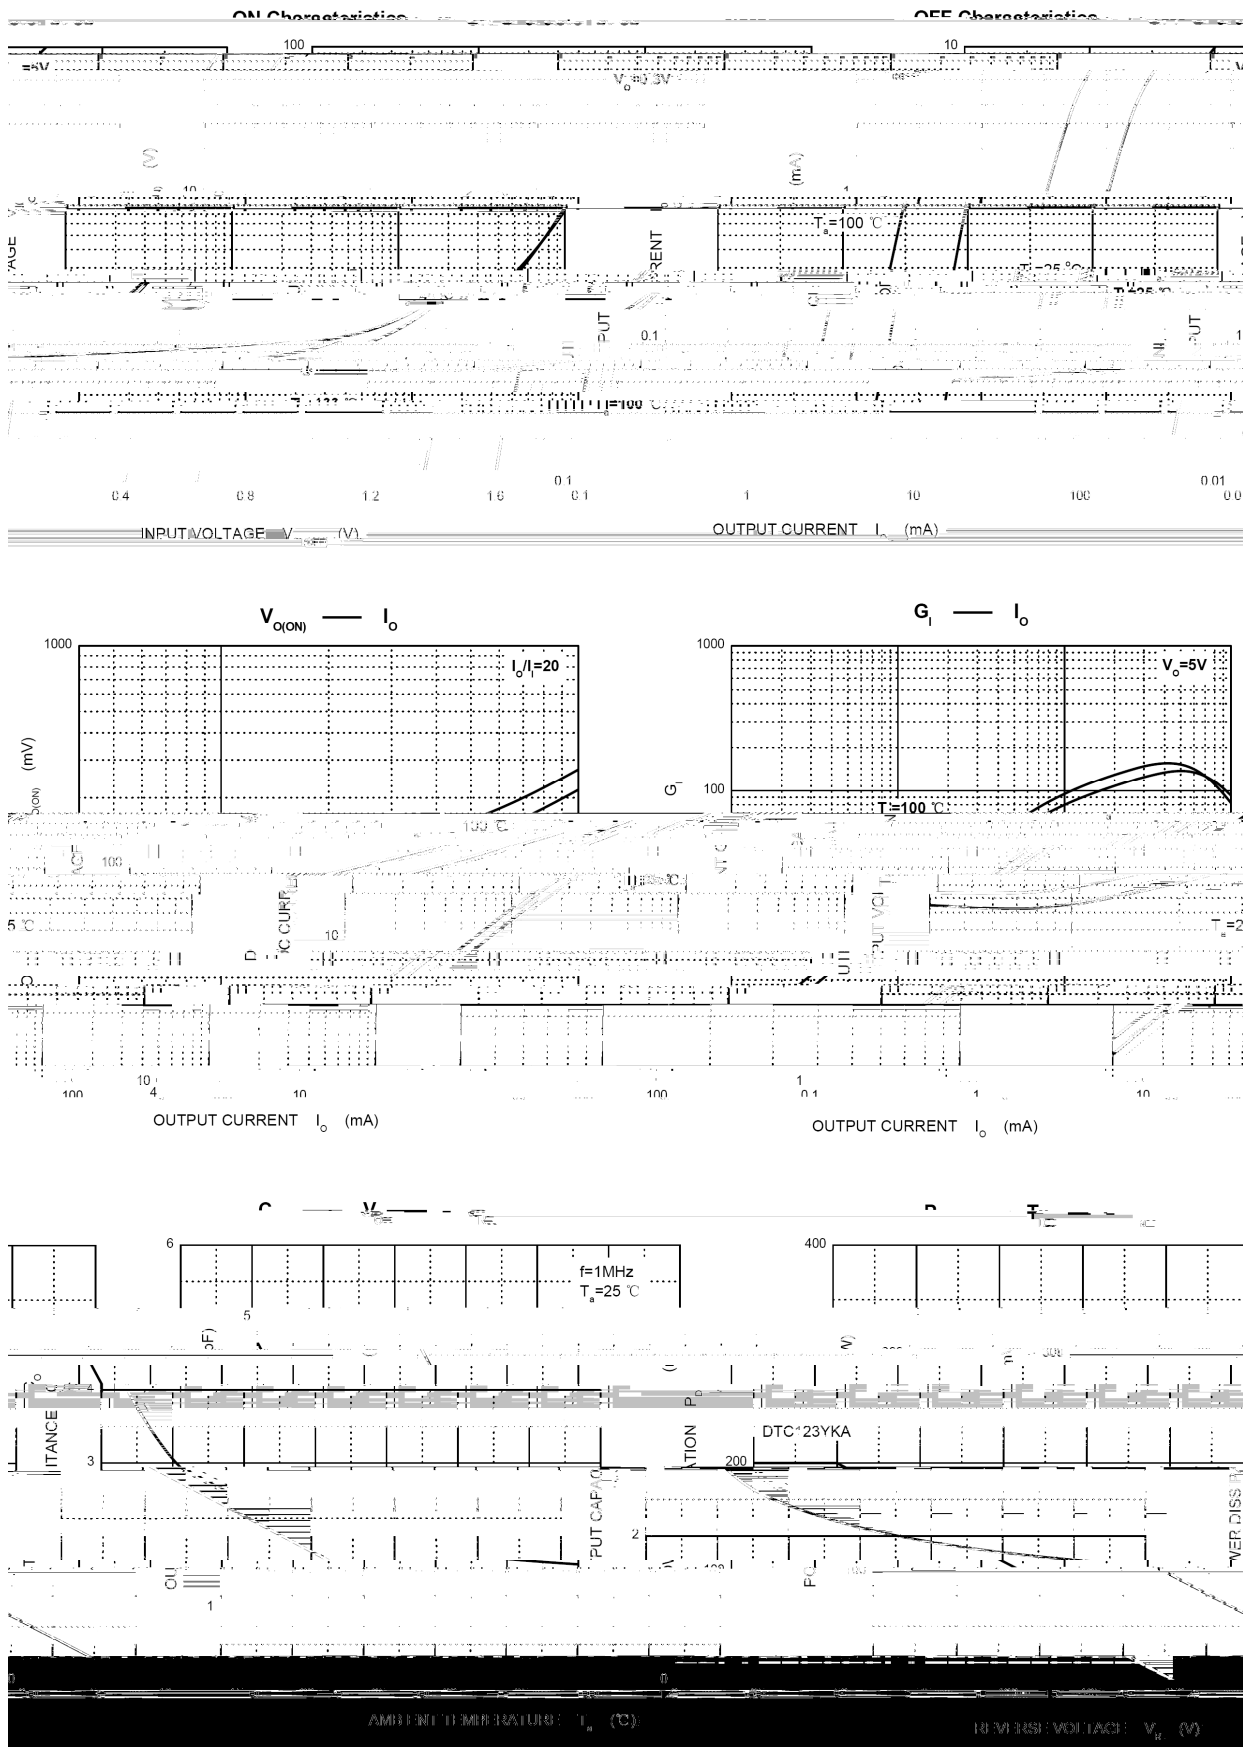



/ A7c87:e DiDe9sio9s

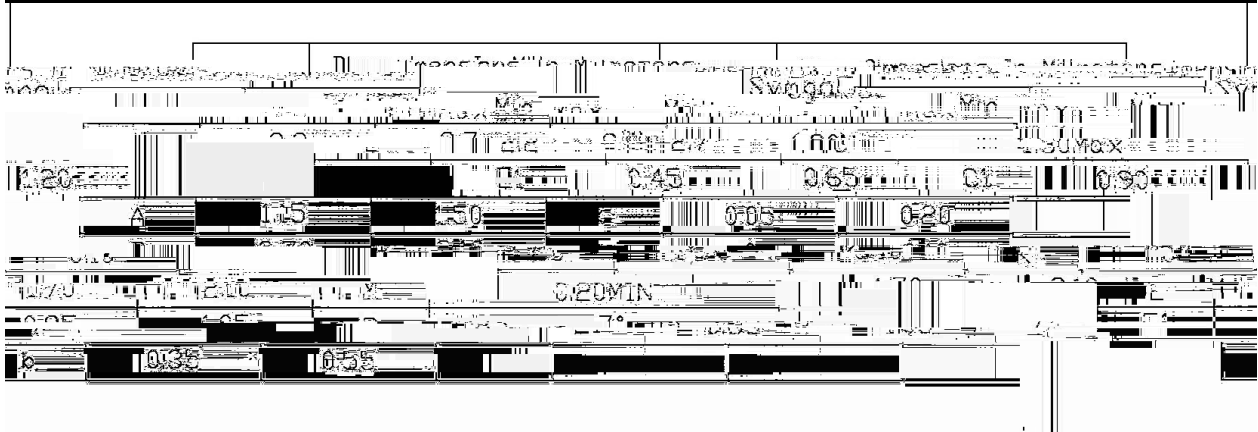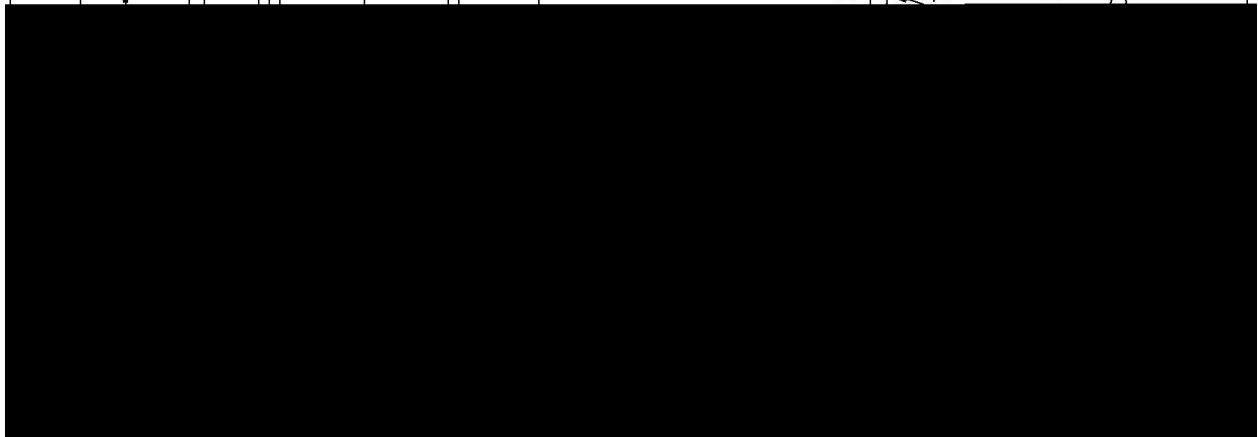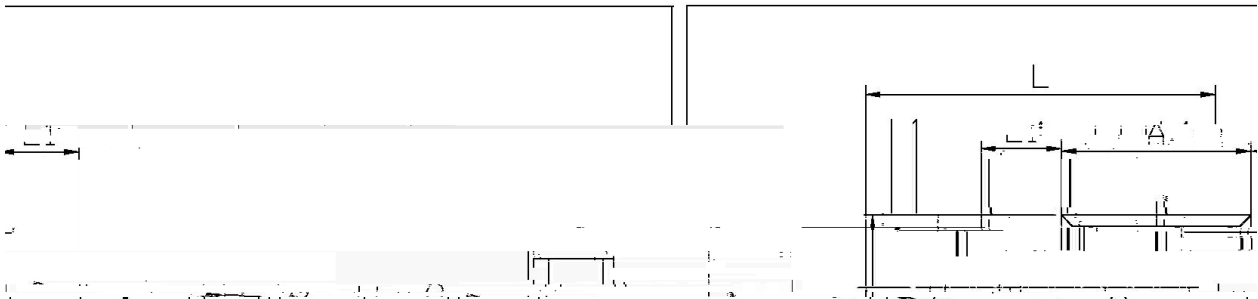



E H / Temperature Profile for IR Reflow Soldering(Pb-Free)

- Note:
1. Preheating:150~180℃, Time:60~90sec.
2. Peak Temp.:245±5℃, Duration:5±0.5sec.
3. Cooling Speed: 2~10℃/sec.
- 11501806090sec;
2245±55±0.5sec;
3210℃/sec.

/ Resistance to Soldering Heat Test Conditions

260±5℃10±1 sec.Temp.:260±5℃Time:10±1 sec

/ A7c87:i9: SAECL

/ REEL

(12.808())TJ ET. 13686.04 353.01 m3686.04 42629 I 53764 12629 53764 353.01 I h W* n BT58.04 0 0580400 Tm /F8 1 Tf 0 0 0 sc 0 0 0 SC 0 Tr 013.47869.237
Package type
封装形式