


GBJ35005~GBJ3510

Rev.A .Jul.-2018



DATA SHEET

50~1000V


35 A GBJ

Glass Passivated Bridge Rectifiers, Reverse Voltage:50~1000V,Forward Current:35

10

Parameter	Symbol	GBJ	Rating	Unit
-----------	--------	-----	--------	------


/ Electrical Characteristic Curve

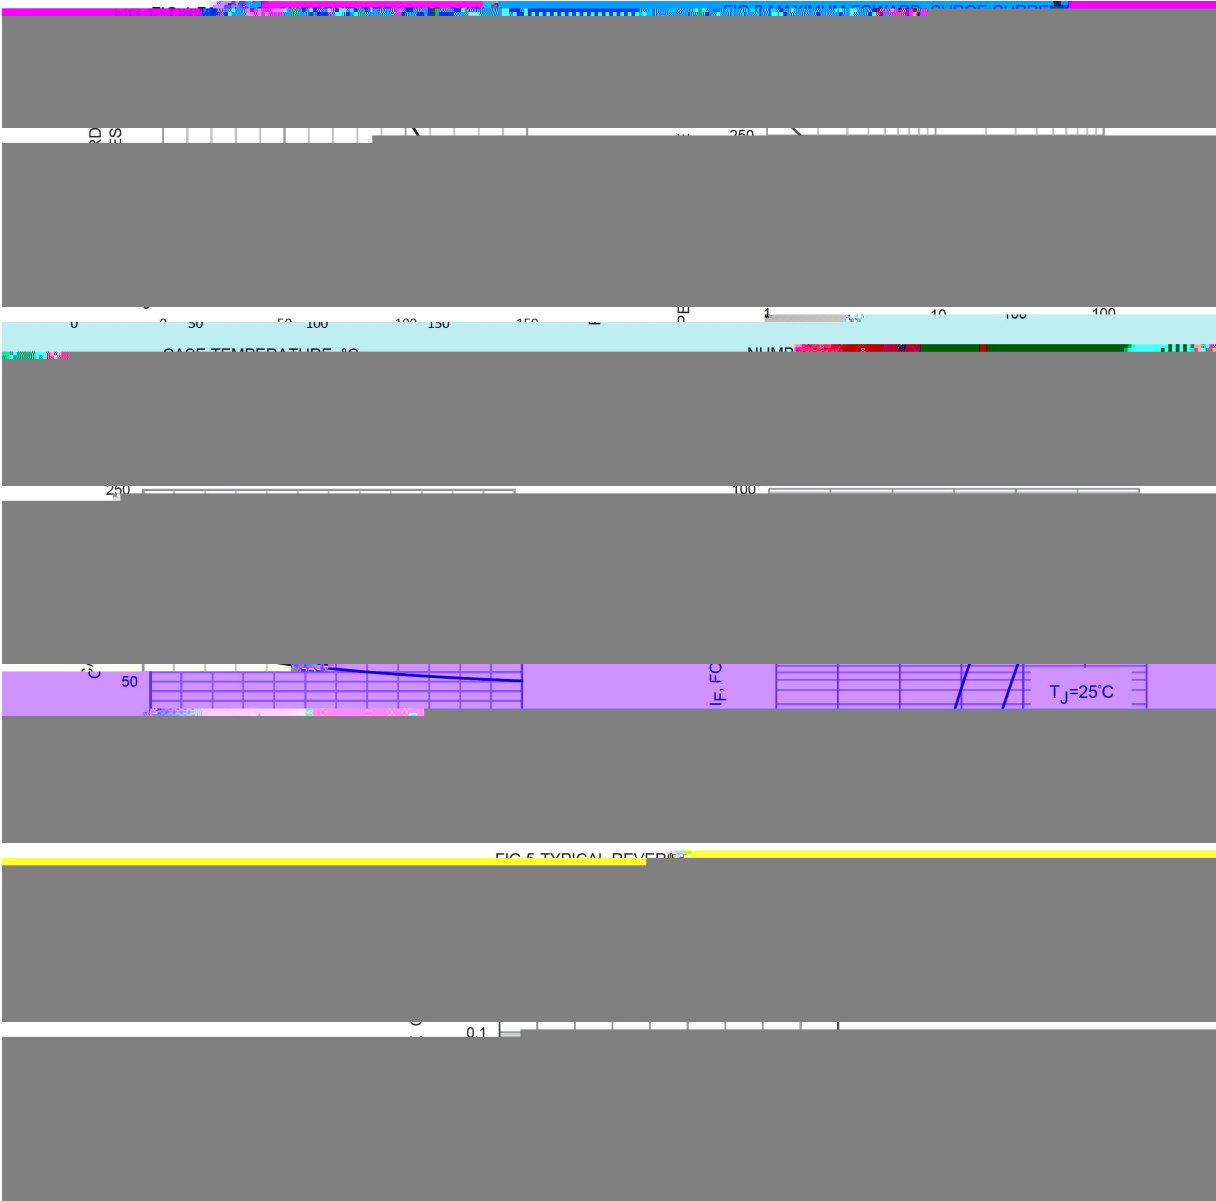

/ Package Dimensions



/ Marking Instructions

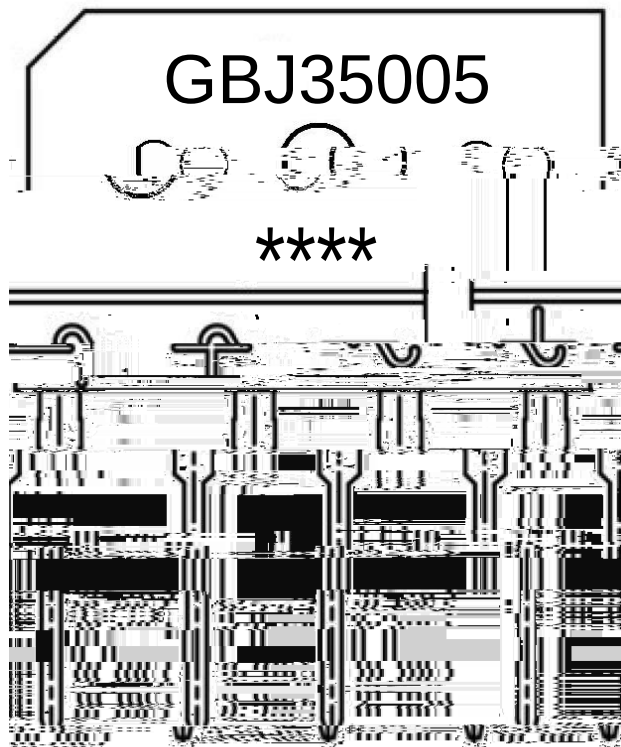


GBJ35005

Note:

GBJ35005: Product Type.
****: Lot No. Code, code change with Lot No

() / Temperature Profile for Dip Soldering(Pb-Free)

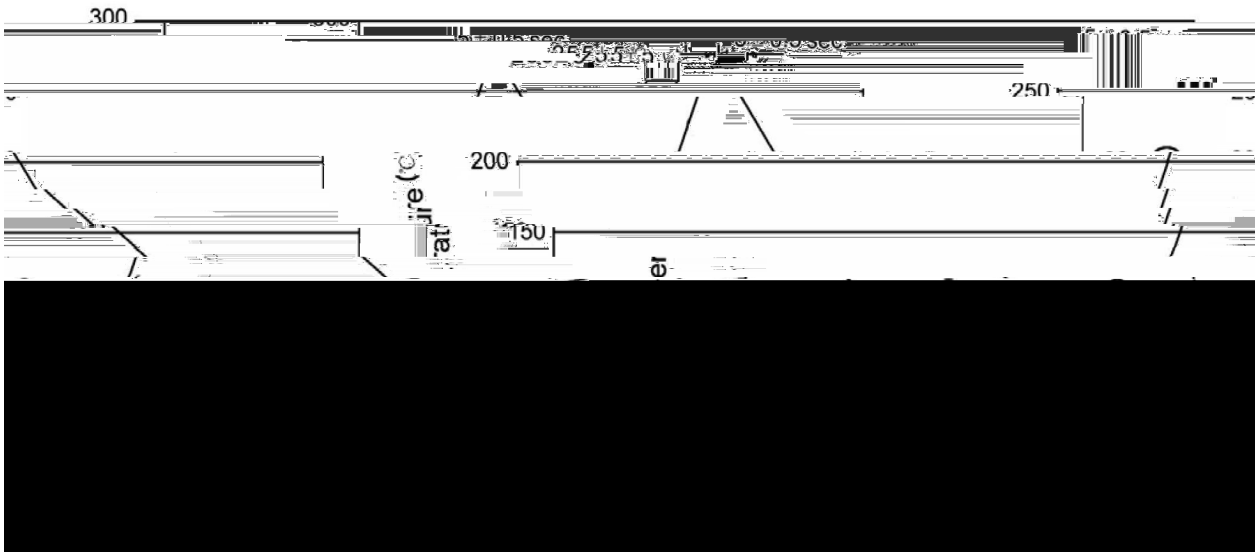

		Note:	
1	25 150	60 90sec;	1.Preheating:25~150 , Time:60~90sec.
2	255±5	5±0.5sec;	2.Peak Temp.:255±5 , Duration:5±0.5sec.
3	2 10	/sec.	3. Cooling Speed: 2~10 /sec.

/ Resistance to Soldering Heat Test Conditions

270±5	10±1 sec.	Temp.:270±5℃	Time:10±1 sec
-------	-----------	--------------	---------------

/ Packaging SPEC.

/ BULK